

TST - C-8~16PO

VHM - Schafffräser mit Kreuzverzahnung
Solid carbide burr-style end mill



Ø-Bereich / Ø-range: 4,00 - 12,00 mm

Durchmessertoleranz / diameter tolerance:

Ø ≤ 5,00 mm: 0/-0,010 mm


Ø ≤ 12,00 mm: -0,010/-0,025 mm

Anwendung / application:

- Graphit / graphite
- GFK/CFK / composites

Merkmale / characteristics:

- NANO Diamant-Beschichtung / NANO diamond coating
- 30° Helix / helix
- 8~16 Schneiden / flutes

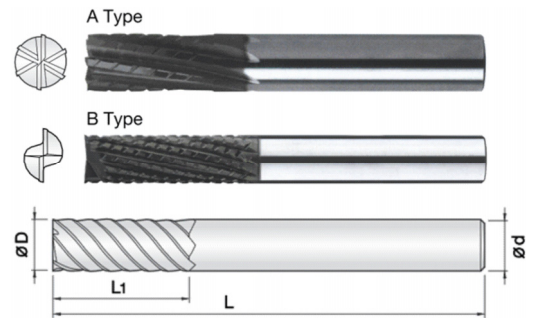

Bestell-Nr. Order No.	D	L1	L	d	Typ type	Schneiden flutes	PG 35
							Stück / piece
600.212001	4,00	16	60	4	A	8	€ 101,34
600.212002	4,00	16	60	4	B	8	€ 101,34
600.212003	5,00	20	60	6	A	10	€ 114,00
600.212004	5,00	20	60	6	B	10	€ 114,00
600.212005	6,00	20	70	6	A	10	€ 114,00
600.212006	6,00	20	70	6	B	10	€ 114,00
600.212007	8,00	25	80	8	A	12	€ 146,66
600.212008	8,00	25	80	8	B	12	€ 146,66
600.212009	10,00	27	80	10	A	14	€ 206,66
600.212010	10,00	27	80	10	B	14	€ 206,66
600.212011	12,00	30	80	12	A	16	€ 249,34
600.212012	12,00	30	80	12	B	16	€ 249,34

Typ A / type A

Besonders geeignet für das Nutenfräsen.
Specially optimized for slotting.

Typ B / type B

2 Stirnschneiden für horizontale und vertikale Bearbeitung.
2 bottom edges for excellent performance in vertical and horizontal machining.