

TST - S-1TE

VHM - Kegel-Schaftfräser
Solid carbide taper end mill



Ø-Bereich / Ø-range: 0,00 - 0,20 mm

Durchmessertoleranz / diameter tolerance:

Ø = 0,00 mm: 0,050/0 mm

Ø ≤ 0,20 mm: 0/-0,020 mm

Anwendung / application:

- vorvergütete Stähle / pre-hardened steels


- gehärtete Stähle / hardened steels

Merkmale / characteristics:

- TiSiN-Beschichtung / TiSiN coating

- 0° Helix / helix

- 1 Schneide / flute

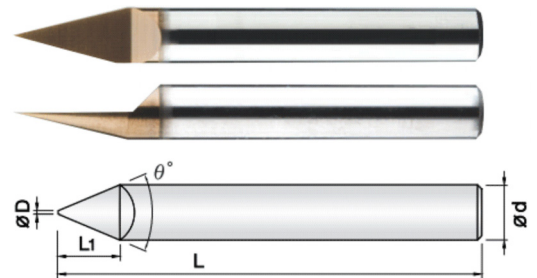

Bestell-Nr. Order No.	D	Winkel angle	L1	L	d	PG 40
						Stück / piece
600.080001	0	20°	5	40	4	€ 30,33
600.080002	0	30°	5	40	4	€ 30,33
600.080003	0	20°	5	50	6	€ 37,68
600.080004	0	30°	5	50	6	€ 37,68
600.080005	0,10	20°	5	40	4	€ 30,33
600.080006	0,10	30°	5	40	4	€ 30,33
600.080007	0,10	20°	5	50	6	€ 37,68
600.080008	0,10	30°	5	50	6	€ 37,68
600.080009	0,15	20°	5	40	4	€ 30,33
600.080010	0,15	30°	5	40	4	€ 30,33
600.080011	0,15	20°	5	50	6	€ 37,68
600.080012	0,15	30°	5	50	6	€ 37,68
600.080013	0,20	20°	5	40	4	€ 30,33
600.080014	0,20	30°	5	40	4	€ 30,33
600.080015	0,20	20°	5	50	6	€ 37,68
600.080016	0,20	30°	5	50	6	€ 37,68